


- NOTES:
- 1) FUNCTION: MORTISE ANSI LOCKCASE
 - 2) DIMENSION "X" IS VARIABLE DEPENDING ON DOOR THICKNESS. CENTER-LINE OF STRIKE MUST BE SAME AS CENTER-LINE OF LOCK CASE.
 - 3) STRIKE LOCATION ON FRAME MUST BE ADJUSTED FOR THICKNESS OF DOOR WHEN SILENCERS ARE USED.
 - 4) FOR OPPOSITE HANDLING, MIRROR DIMENSIONS TO OTHER SIDE OF JAMB.

Description:
MORTISE STRIKE-ANSI A115.1
 (TECHNICAL DATA)



TOLERANCES UNLESS OTHERWISE SPECIFIED:
 X.X (METRIC)= ±0.5
 X.XX(METRIC)= ±0.15
 0.00"(UNIFIED)= ±.015"
 0.000"(UNIFIED)= ±.005"

Drawing No: DP-156	
Drawn By:	JWB
Orig.Date	09-22-23
Rev. Date:	09-22-23
Rev.:	C (JDK)

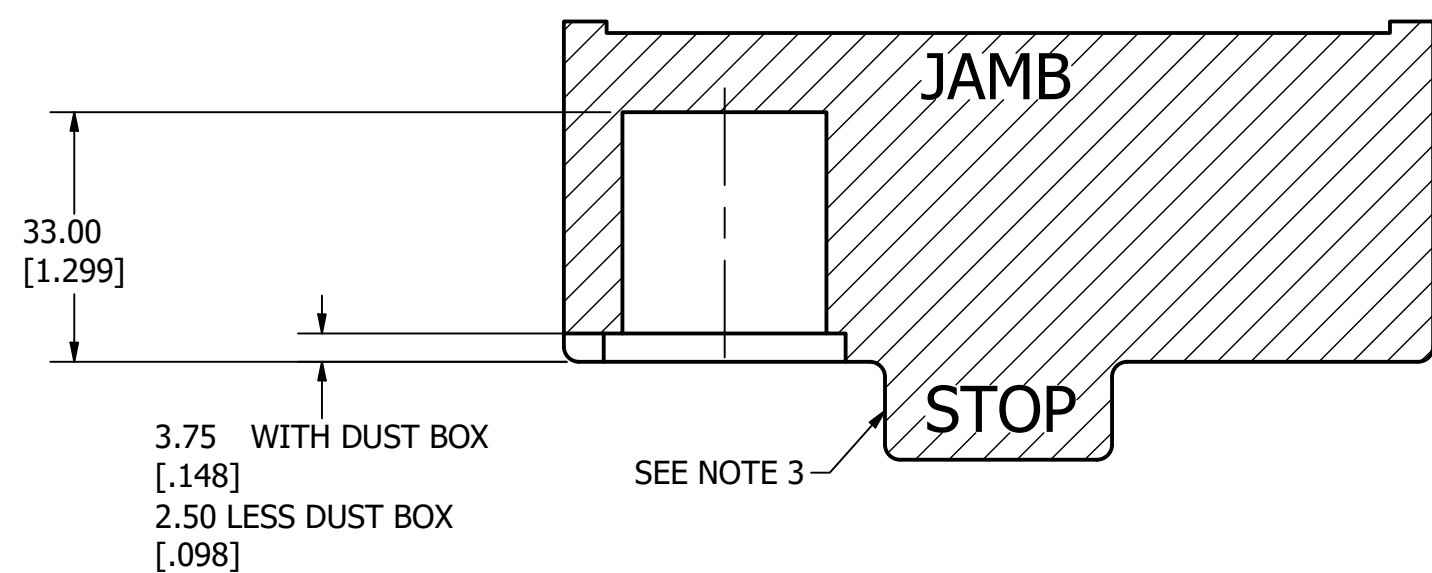

SECTION A-A

