



# HOW TO CHANGE HANDING

For All Boxes ( Figure 1 )

1. Use hex key to unfasten the screw in the hole behind latchbolt (green label).
2. Pull latchbolt out until it is entirely away from lock case.
3. Rotate latchbolt to adjust handing.
4. Fasten the screw tightly into the hole and glue with Threadlocker (Loctite 242).

Additional Steps for Split-hub boxes (Figure 2)

5. Use blade screwdriver to push down locking piece (green label) to other side.
6. Handing is completely reversed.

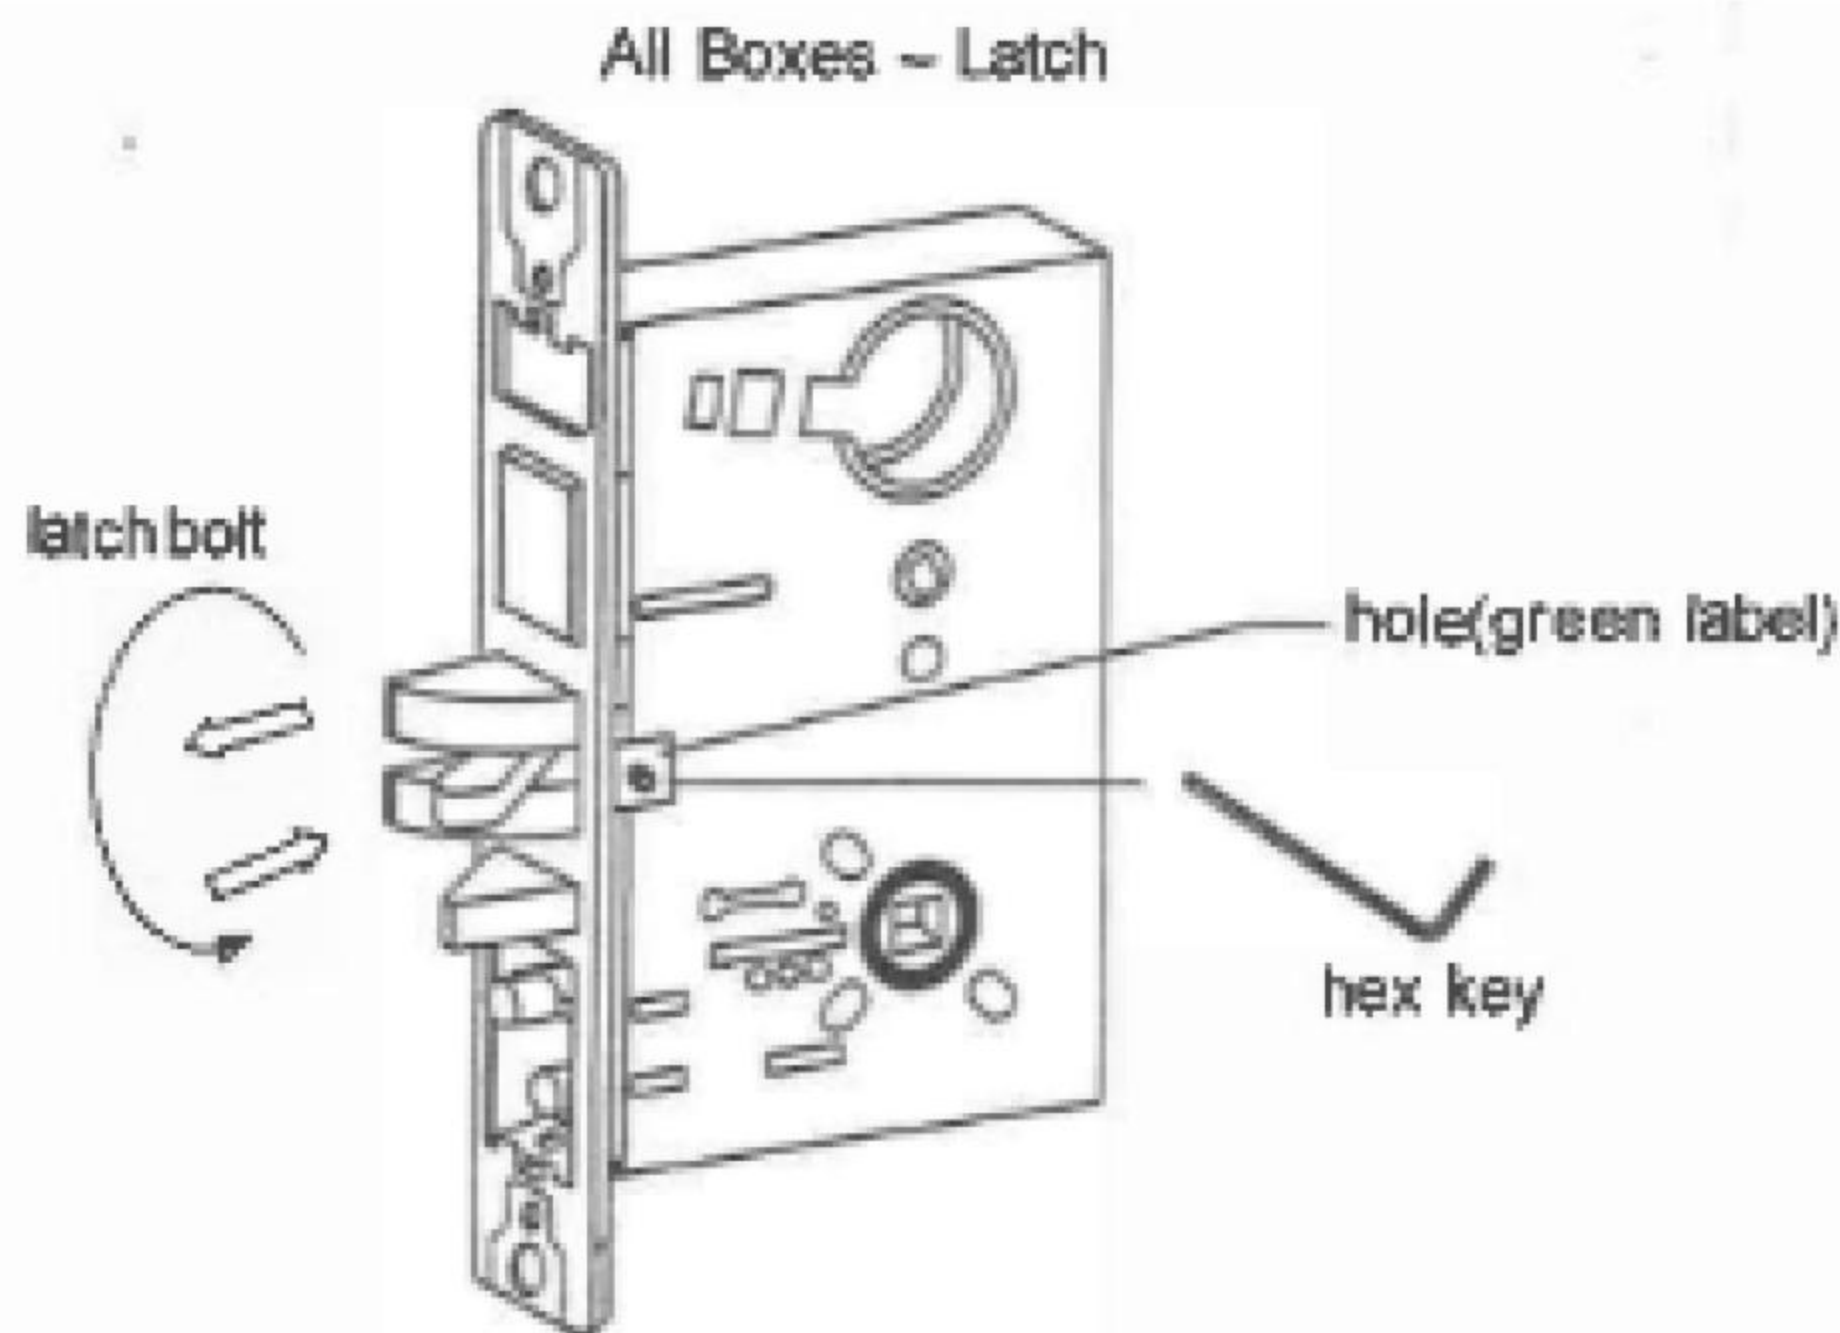


Figure 1

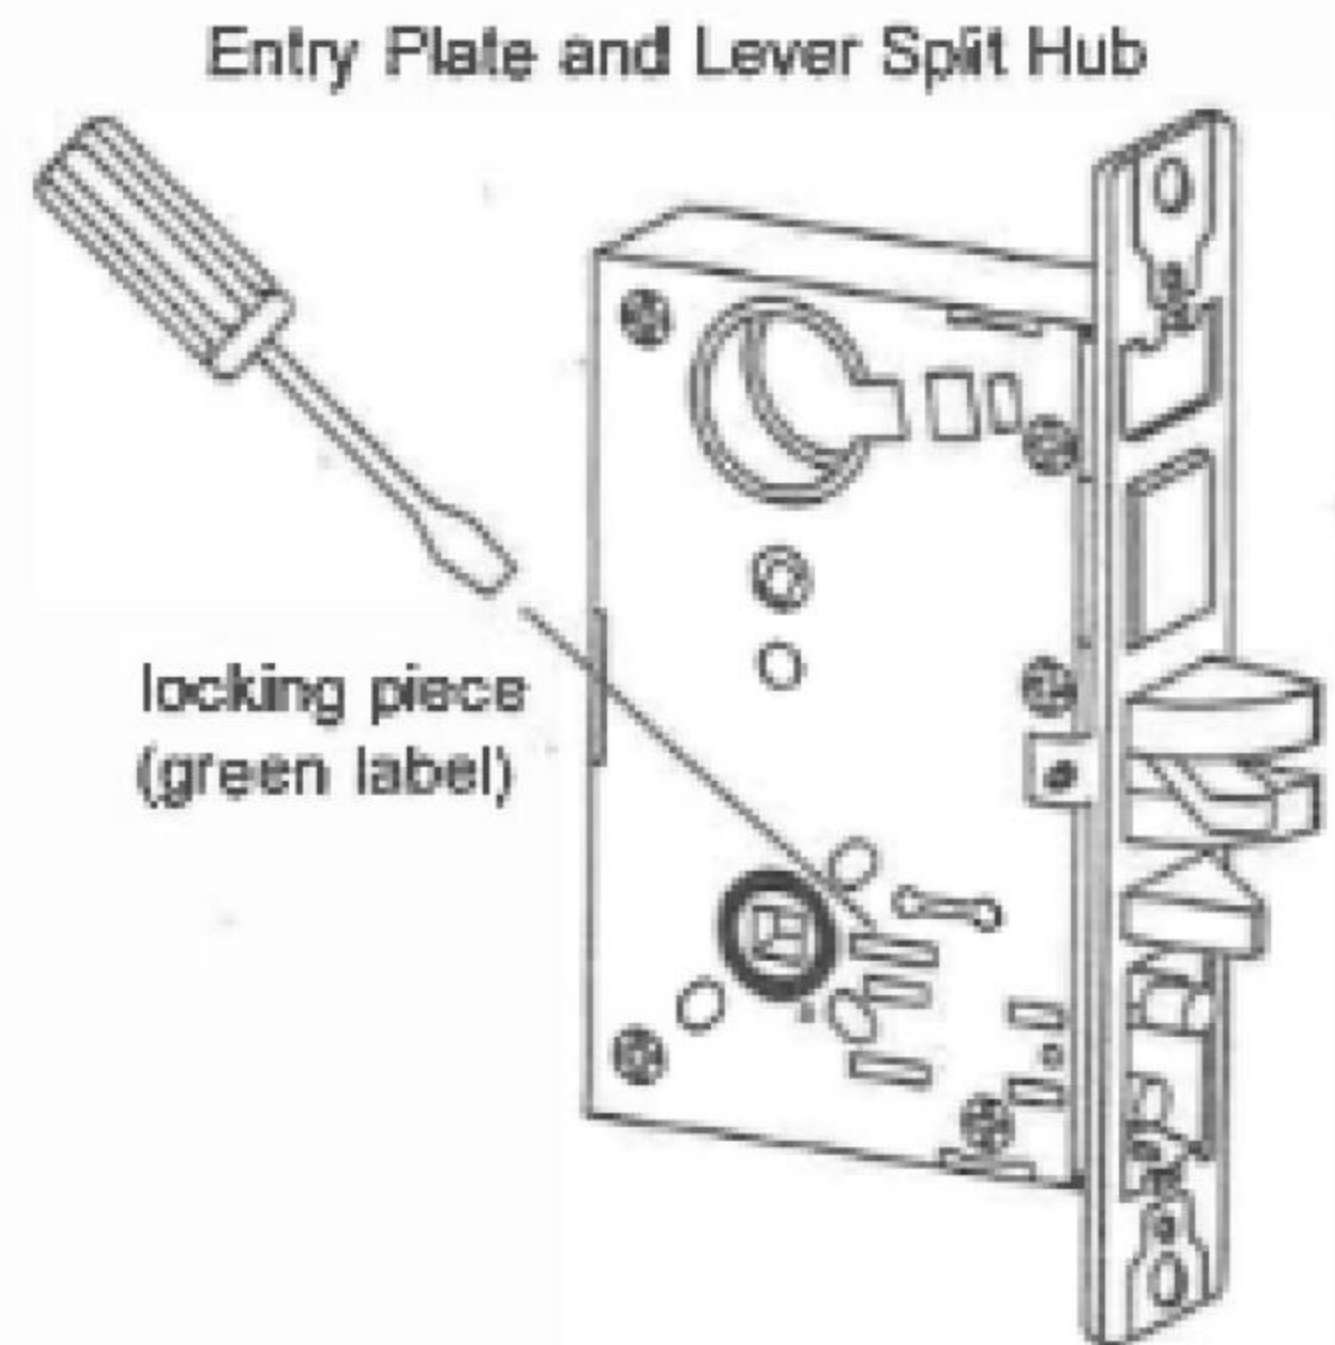


Figure 2