



CAREFULLY READ THE INSTRUCTIONS BEFORE INSTALLING

- A)** INSIDE PULL
- B)** OUTSIDE PULL
- C)** THROUGH BOLT
- D)** RETAINING BUSHING
- E)** SET SCREW
- F)** HEX WRENCH
- G)** POST OF PULL
- H)** THROUGH HOLE

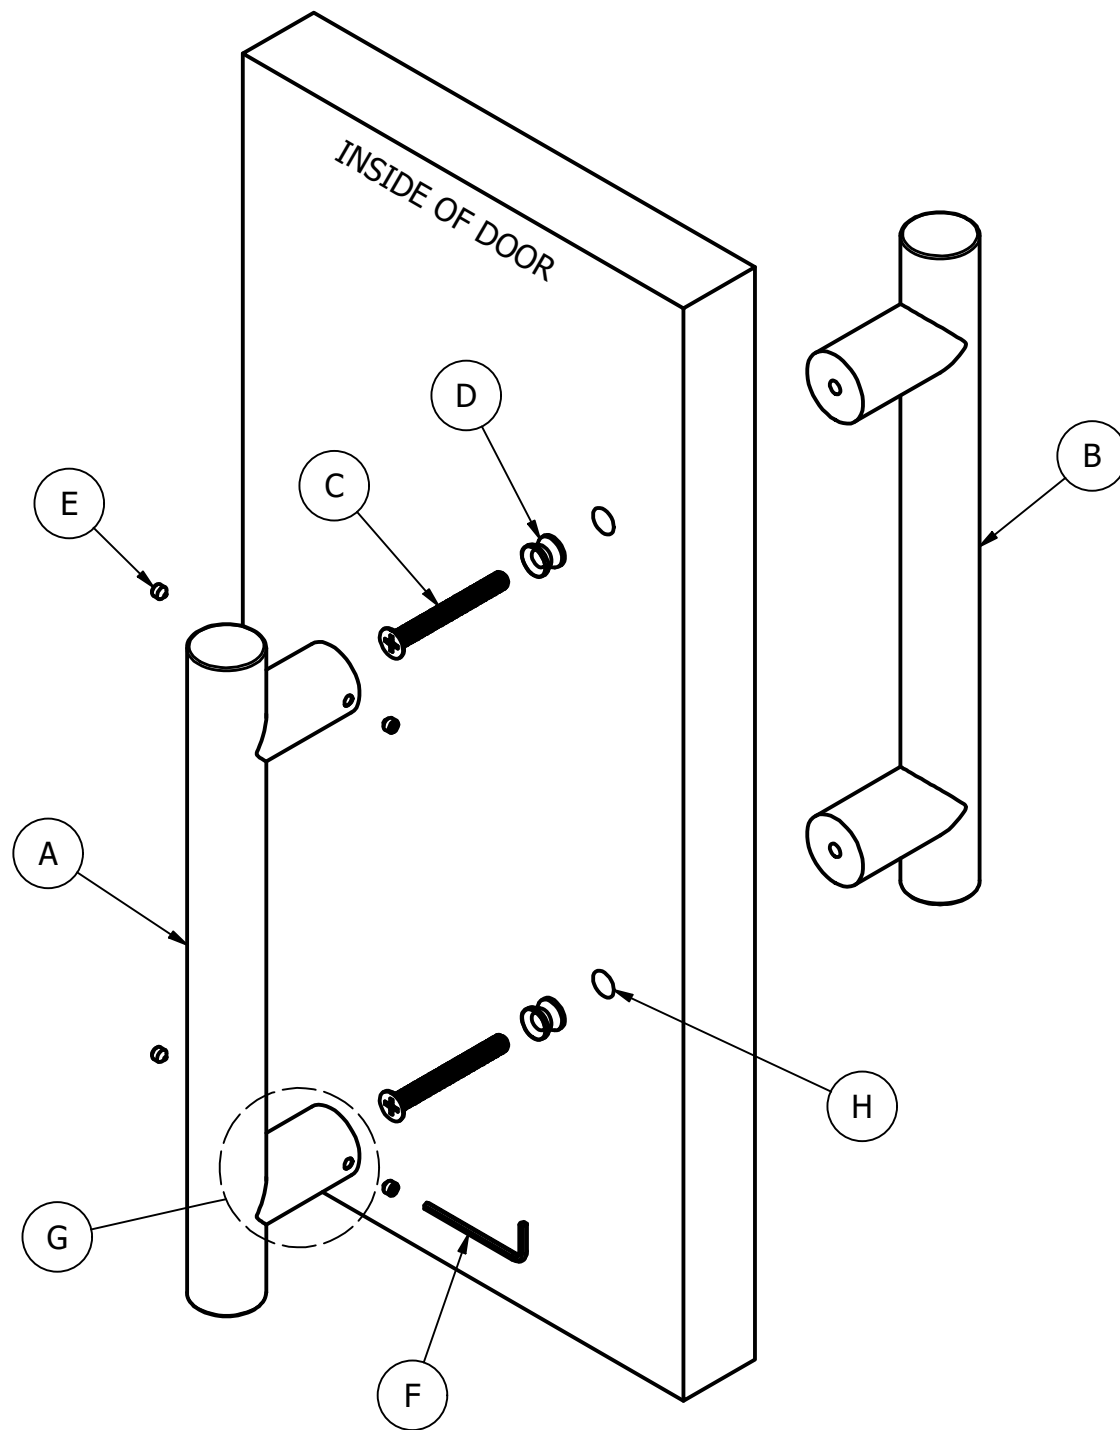


STEP 1)

- A. PREPARE DOOR ACCORDING TO DP-360 OR THE MODEL-SPECIFIC DOOR PREPARATION TEMPLATE.
- B. USE THE HEX WRENCH (F) TO LOOSEN (BUT NOT FULLY REMOVE) THE SET SCREWS (E) IN THE SIDES OF THE INSIDE PULL POSTS (G) TO SEPARATE THE TWO SUB ASSEMBLIES.
- C. UNTHREAD THE THROUGH BOLTS (C) FROM THE OUTSIDE POSTS (G).

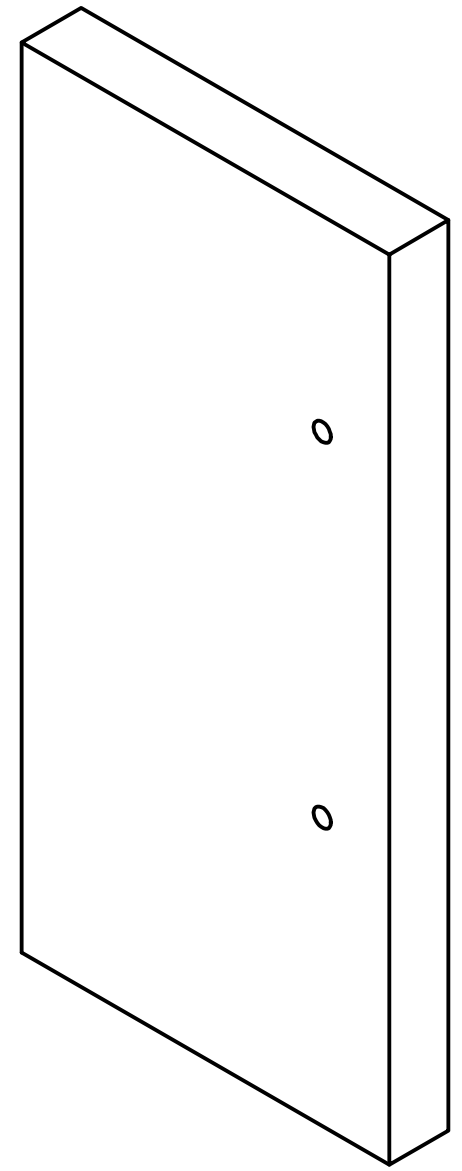


STEP 2)

- A. INSERT EACH THROUGH BOLT (C) INTO A RETAINING BUSHING (D) AND THEN INSERT INTO A THROUGH HOLE (H) FROM THE INSIDE OF THE DOOR.
- B. THREAD EACH THROUGH BOLT (C) INTO A POST (G) OF THE OUTSIDE PULL (B).
- TIP:** USE A THREAD LOCKING COMPOUND, SUCH AS LOCTITE FOR ADDED STABILITY.

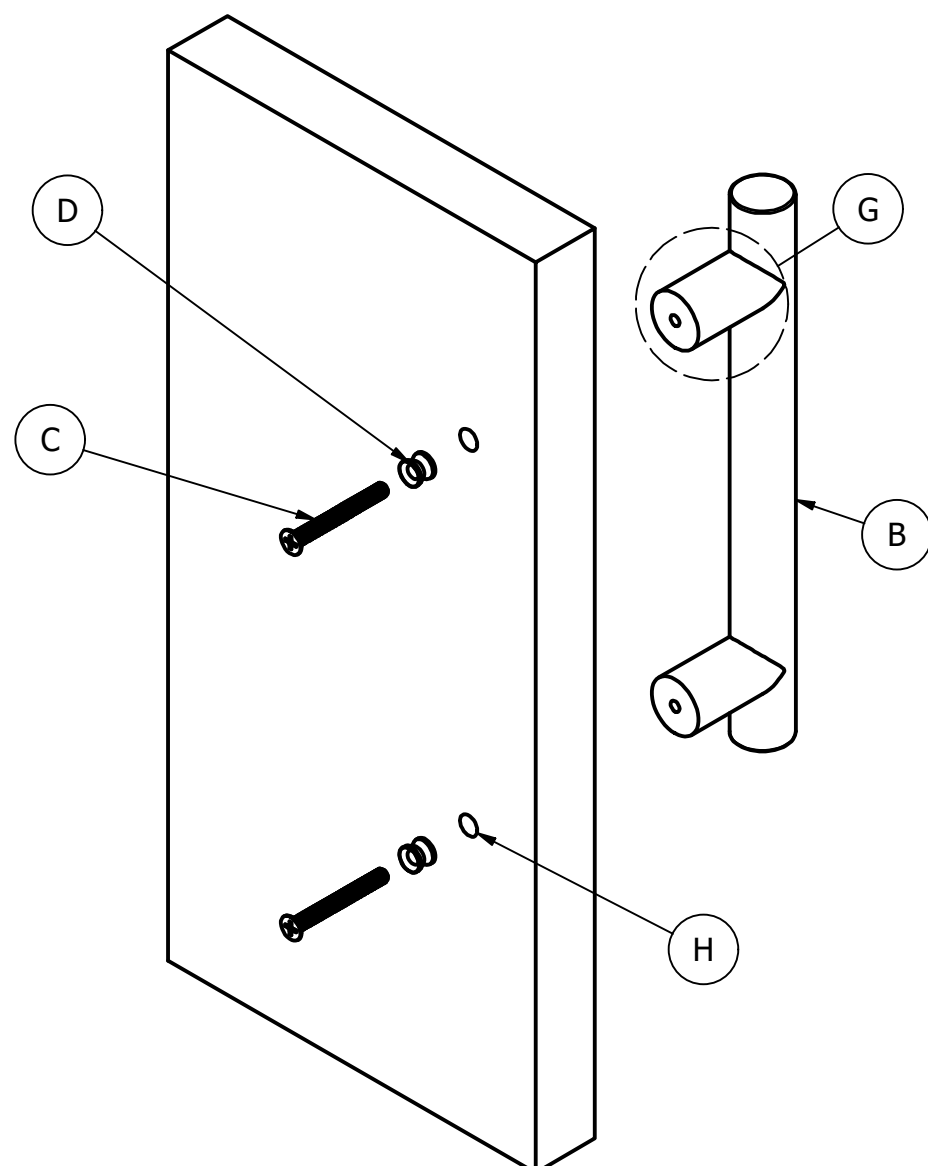

STEP 3)

- A. INSERT THE INSIDE PULL (A) OVER THE RETAINING BUSHINGS (D), MAKING SURE THE PULL IS SEATED AGAINST THE DOOR SURFACE.
- B. USE THE PROVIDED HEX WRENCH (F) TO TIGHTEN THE SET SCREWS (E).

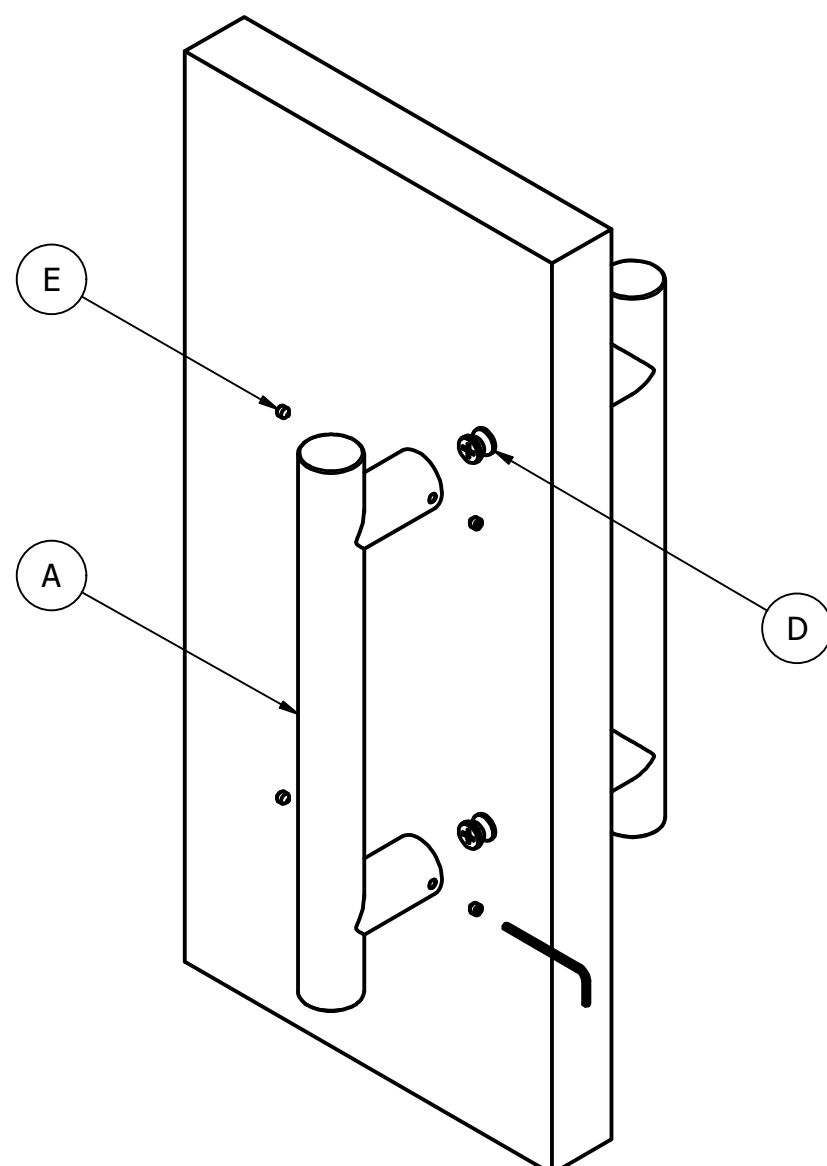

STEP 4)

- A. TEST THE DOOR PULL FOR SECURE INSTALLATION AND MAKE ADJUSTMENTS AS NEEDED IF THERE IS ANY LOOSENESS.

